

























## **METRIC OR ENGLISH UNITS**

Shown on the diagram but no longer available

## **REPLACING COVER**

Use care not to damage the seal.


## **DISPLAY SWITCH**

Shown on the diagram but no longer available



\*NOTE: Be sure to tighten screws above slots when finished.

### Diagram 1: Location and Polarity of Connectors and Switches.

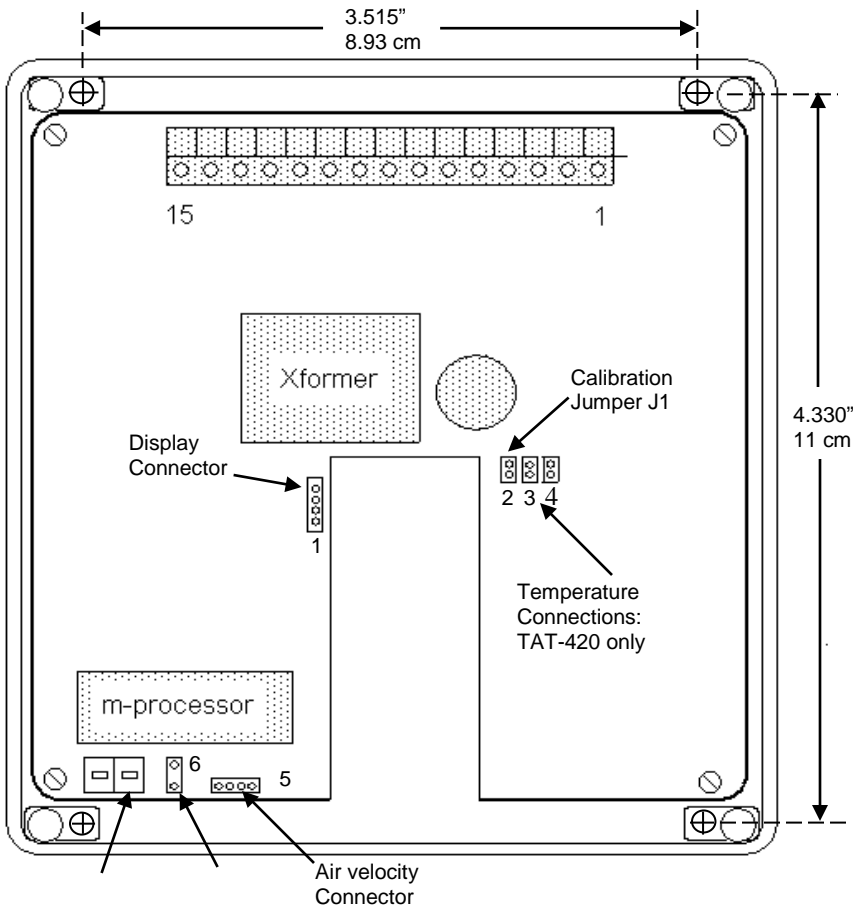

---

## **APPENDIX A – No Longer Available**

## **APPENDIX B – No Longer Available**

---

<sup>1</sup>In order to insure the proper calibration, all custom-length cables for air probes with temperature sensors must be ordered at the time the transmitter is purchased; or the unit must be returned for calibration.

<sup>2</sup>Cable grips will seal on round cables from 2.5 to 6.5mm diameter. For wire bundles, if you wish to insure water tightness, use RTV silicon or other sealant safe for electronics at end of cable grip.

### **Notes:**



219 US Hwy 206  
PO Box 372  
Andover, NJ 07821  
800-247-8887 or 973-786-6386  
[sales@kanomax-usa.com](mailto:sales@kanomax-usa.com)

---

Page 15 of 16

## Notes:



**Miltronics Mfg., Inc.**  
95 Krif Road  
Keene, New Hampshire 03431  
USA  
(800) 283-1141  
(603) 352-0187  
Main Fax: (603) 352-4444  
[sales@miltronics.com](mailto:sales@miltronics.com)

[www.miltronics.com](http://www.miltronics.com)  
[www.pacer-instruments-usa.com](http://www.pacer-instruments-usa.com)

Copyright ©2016, Miltronics Mfg., Inc.  
Miltronics, AT400, TAT420, THT500 and the  
Miltronics Mfg., Inc. logo are trademarks of Miltronics Mfg., Inc.